


## FLUSHING REFRIGERATION CIRCUITS

**NEW**

- ATEX PUMP
- PULSATING EFFECTIVENESS
- SIMPLE USE
- FLUSH & DRY



### EXAMPLE DIAGRAM

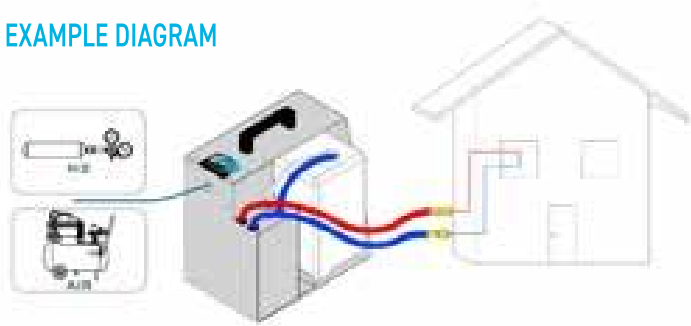

### Technical features

Rate	7 l/min
Supply	Nitrogen kit * or compressed air (max 8 bar)
Suggested flushing fluids	FF1, SUPER-FLUSH and FORMULA
Hoses	2 x 1,5 mt
Pneumatic connection	Quick coupler - Italy (for compressed air) / 1/4"SAE M (for nitrogen kit)
HVAC connections kit included	1/4"SAE, 3/8"SAE e 1/2"SAE

\* With the BN2/1-TPED 1 lt nitrogen cartridge several single-split can be flushed

### FF1 CLIMA-FLUSH

#### Pneumatic flushing station

FF1-CLIMA-FLUSH-HVAC is the new pneumatic FLUSHING and FLUXING station for HVAC systems, that can operate with FF1 flammable fluid and with SUPER-FLUSH.

The efficiency given by the circulation of the fluid in the system is enhanced by the pulsing action, while the dry mode allows to perform the final flushing of the circuit.

The station allows a clean work in a simple way by switching from flushing to fluxing via a single diverter valve.

The pneumatic station can be supplied in a flexible way, either via the compressed air line or via a nitrogen kit.

The flushing fluid can be introduced into the removable tank or sucked directly from the fluid container, thanks to the self-priming pump.

#### Main functions:

- Compatible with FF1 flammable fluid.
- Pulsating flow rate which, combined with the degreasing/detergent action of the washing fluid, offers a higher working efficiency.
- Very easy to use thanks to a single diverter valve: flushing or fluxing can be selected with a single action.
- Built-in removable tank (5 l).
- Easy to maintain filter included.
- Possibility to suck the fluid directly from the container.
- The fluid is not overheated by the pump, thus maintains its characteristics.
- Can be used without power supply.
- Can be used either with nitrogen kit or compressed air.
- Flexible hoses of 1500mm.
- Compact, light and easily transportable

Code	Model	Description
13005077001	FF1-CLIMA-FLUSH-HVAC	HVAC pneumatic station

Code	Dimensions	Weight
13005077001	310 x 295 x 300 mm	3,5 kg



### Spare parts and accessories

Codice	Modello	Descrizione
14015040	FF1-FILT	Replacement filter for FF1-CLIMA



### FF1

#### Flushing fluid

Easy evaporation flushing fluids, for HVAC-R systems, in 1 liter cans. Does not leave any residue.

Usable only with pressure systems (A/CF-P-H) and pneumatic units (FF1-CLIMA-FLUSH and CLIMA-FLUSH-HP).

Code	Model	Min. Qty	Pack dimensions	Pack weight
13005006	FF1	12	350 x 270 x 250 mm	10,5 kg